SHOP DRAWING FOR PR NO. 23-0165 200mmØ G.I. PIPE PNS 26, HEAVY GAUGE Outside Diameter: 219.1mm WITH FLANGES WELDED Wall Thickness: 8.2mm (minimum: 7.38mm) ON BOTH ENDS LENGTH = 6.00m (MINIMUM) 200mmØ G.I. PIPE PNS 26, HEAVY GAUGE Outside Diameter: 219.1mm Wall Thickness: 8.2mm (minimum: 7.38mm) PROVIDE 8PCS, -19mm.Ø x 88mm. STAINLESS STEEL BOLT (304) WITH NUT & WASHER BOLT CIRCLE DIAMETER DIAMETER DIAMETER 8.72* 11.75" 13.50* (221mm) (343mm) (298mm) PROVIDE 17mm. thk MS RING FLANGE 17mm (FLANGE THICKNESS) 8 BOLT HOLES w/ 0.875"Ø (22mmØ) SIDE ELEVATION FRONT ELEVATION FLANGE DETAIL PER AWWA C207 CLASS D


200mmØ x 6.00m G.I. PIPE, PNS 26 HEAVY GAUGE STD.
(W/ STEEL FLANGE IN ACCORDANCE TO AWWA C207
CLASS D, WELDED ON BOTH ENDS WITH 8 UNITS 19mmØ x 88mm STAINLESS (FULL THREAD) HEX BOLT
(TYPE 304) w/ NUT AND WASHER

Prepared by:

OIC, DESIGN DIVISION

Submitted by:

MARLI P. ACOSTA-DE FIESTA OIC-AGM, TSG

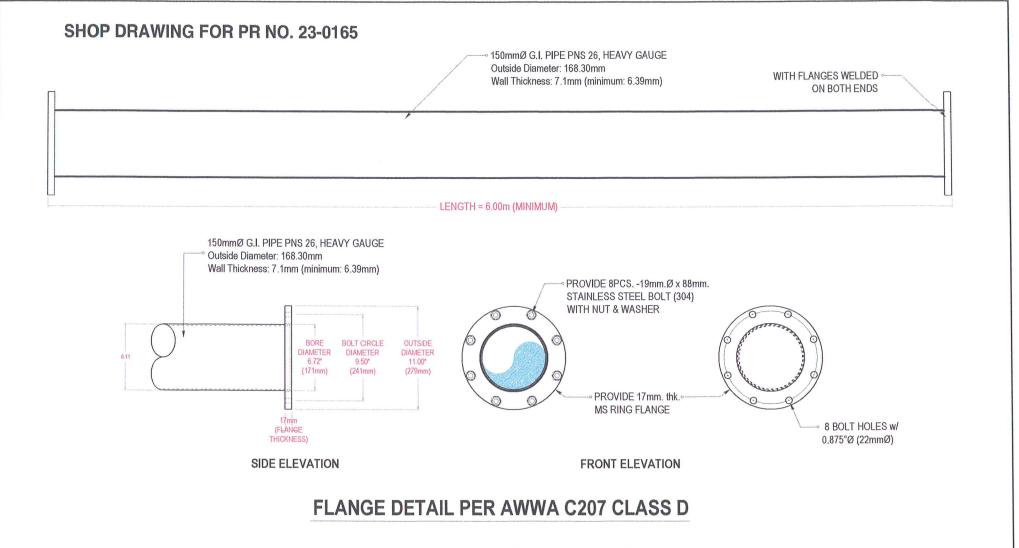

150mmØ x 6.00m G.I. PIPE, PNS 26 HEAVY GAUGE STD. (w/ STEEL FLANGE IN ACCORDANCE TO AWWA C207

CLASS D, WELDED ON BOTH ENDS WITH 8 UNITS - 19mmØ x 88mm STAINLESS (FULL THREAD) HEX BOLT (TYPE 304) w/ NUT AND WASHER

Submitted by:

MARLI P. ACOSTA-DE FIESTA OIC-AGM, TSG

Prepared by:

EDITO M BUATISTA, JR. OIC, DESIGN DIVISION